


*This is a general specification leaflet; for specific applications not covered herein, contact Suntec.*

Quality designed for Suntec units with integral solenoids (AS, AL, A2L, ALE, AR, AT, AP pumps), Suntec connector cables are available in various lengths : from 35 cm to 1 m.

## TECHNICAL DATA

Encapsulation material	Polyamide
Cable type	HO3VV-F
Cross section area	0,5 mm <sup>2</sup> per conductor
Wire end terminals	in accordance with DIN 46228 D1-7 Ms

## DIMENSIONS

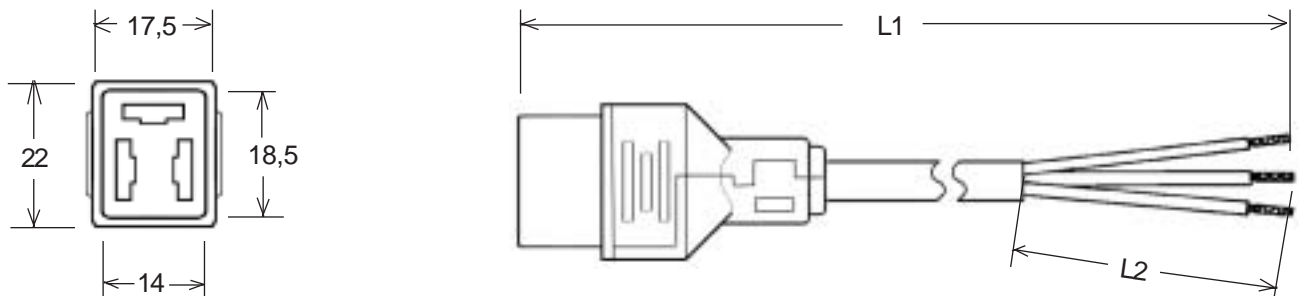

## PART NUMBERS

Total length L1	L2	Connector reference
350 ± 10 mm	70 ± 5 mm	ENC 35
450 ± 10 mm	70 ± 5 mm	ENC 45
610 ± 10 mm	70 ± 5 mm	ENC 60
1000 ± 10 mm	70 ± 5 mm	ENC 100