


This is a general specification leaflet; for specific applications not covered herein, contact Suntec.

Quality designed for Suntec units with integral solenoids (AS, AL, A2L, ALE, AR, AT, AP pumps), Suntec connector cables are available in various lengths : from 35 cm to 1 m.

TECHNICAL DATA

Encapsulation material	Polyamide
Cable type	HO3 VV-F
Cross section area	0,5 mm ² per conductor
Wire end terminals	in accordance with DIN 46228 D1-7 Ms

DIMENSIONS

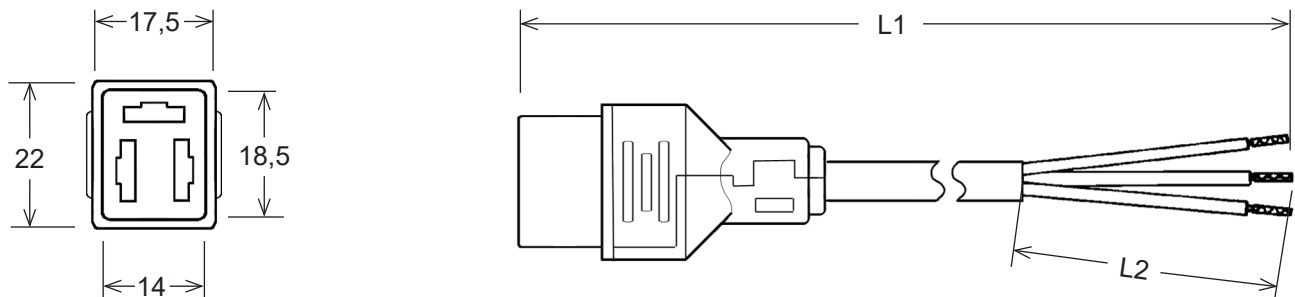

PART NUMBERS

Total length		Connector reference
L1	L2	
350 ± 10 mm	70 ± 5 mm	ENC 35
450 ± 10 mm	70 ± 5 mm	ENC 45
610 ± 10 mm	70 ± 5 mm	ENC 60
1000 ± 10 mm	70 ± 5 mm	ENC 100